

PCM-3110C


PCM-3112

PCM-3115

1-slot PCMCIA Module

2-slot PCMCIA Module

2-slot Card Bus Module

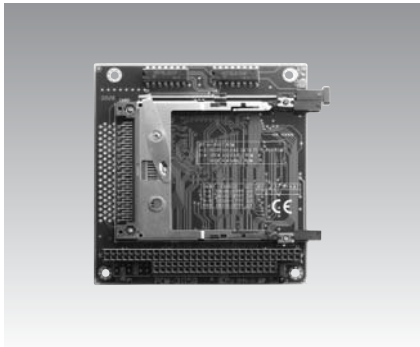

PCM-3110C



Features

- Supports Type I, II, III PCMCIA cards
- 16-bit data bus
- Busy status LED

Specifications


- **Standard** Complies with PCMCIA V2.10 and JEIDA 4.1
- **PC Card Format** Accepts Type I/II/III PCMCIA cards
- **Data Bus** 16-bit
- **Secondary** Supports (PC/104 or external drive)
- **PCMCIA** Card drive with PC/104 bus
- **Drive** 1 main PCMCIA slot extended to 2nd slot with extended (TEAC) FDD extended to 3.5" FDD bay
- **BIOS** Programmable 32 KB SMD boot Flash BIOS
- **Power Consumption** +5 V @ 70 mA (typical)
- **Power Requirements** +5 V, ±5 % tolerance on power supply
- **Size/Weight** 96 mm x 90 mm (3.8" x 3.5"), 0.092 kg (0.203 lb)
- **Temperature** Operating: 0 ~ 60° C (32 ~ 140° F)
Storage: -40 ~ 85° C (-40 ~ 18° F)
- **Operating Humidity** 0% ~ 90% relative humidity, non-condensing

Packing List

- Manual

Ordering Information

- **PCM-3110C-0000** PCMCIA Module

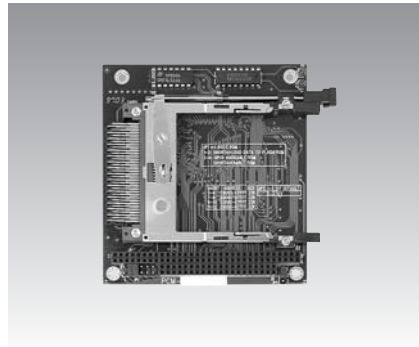

PCM-3112



Features

- 2 PCMCIA slots
- Bootable from linear Flash card or ATA Flash, ATA HDD
- 16-bit data bus
- Busy status LED

Specifications


- **Standard** Complies with PCMCIA V2.10 and JEIDA 4.1 spec
- **PC Card Format** Accepts Type I/II/III PCMCIA cards
- **Data Bus** 16-bit
- **Secondary** Features 2 PCMCIA drives
- **PCMCIA Drive**
- **BIOS** Programmable 32 KB SMD-type boot EEPROM BIOS
- **Power Consumption** +5 V @ 70 mA (typical)
- **Power requirements** +5 V, ±5 % tolerance on power supply
- **Size/Weight** 96 mm x 90 mm (3.8" x 3.5"), 0.1 kg (0.22 lb)
- **Temperature** Operating: 0 ~ 60° C (32 ~ 140° F)
Storage: -40 ~ 85° C (-40 ~ 185° F)
- **Operating Humidity** 0% ~ 90% relative humidity, non-condensing

Packing List

- Manual

Ordering Information

- **PCM-3112-0000** 2-slot PCMCIA module

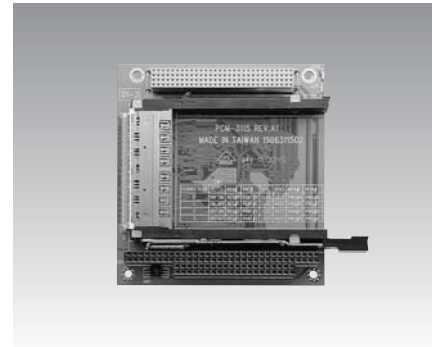

PCM-3115



Features

- High-performance (PC/104-Plus)
- Low power consumption (Hardware Suspend)
- Complies with PC Card 95/97/98, Card-32 (32 Bit), PCMCIA V2.1 / JEIDA 4.2 (16 Bit)
- Accepts Type I/II/III PCMCIA cards
- Supports 2 PCMCIA slots (when Type III card used in Slot 2, Slot 1 will be occupied too)

Specifications

- **Chipset** Ricoh Card Bus Controller
- **16-bit Legacy mode** YES (3E0/3E2 I/O port) support
- **GPIO Support** YES
- **PCI way Legacy DMA** YES supported
- **Data Bus** 32-Bit data bus (Compliant with PCI Bus Specification 2.1)
- **PCI Interface** 3.3 V interface (5 V tolerant)
- **H/W Configuration** Plug & Play automatic detection & configuration
- **S/W Driver** Supports Windows® NT 4.0, Windows® 95/98/2000
- **Power Consumption** +5 V @ 70 mA (typical)
- **Power Requirements** +5 V, ±5 % tolerance on power supply
- **Size/Weight** 96 mm x 90 mm (3.8" x 3.5"), 0.094 kg (0.207 lb)
- **Temperature** Operating: 0 ~ 60° C (32 ~ 140° F)
Storage: -40 ~ 85° C (-40 ~ 185° F)
- **Operating Humidity** 0% ~ 90% relative humidity, non-condensing

Packing List

- Start up manual
- CD-ROM (Manual, Driver, Utility)

Ordering Information

- **PCM-3115-00A1** 2-slot Cards Bus module